

M2


LIVE PERFORMANCE
CONDENSER MICROPHONE

The M2 is a rugged condenser microphone that is designed for the ultimate in performance for live vocals. Featuring an internally shock-mounted 1/2-inch condenser capsule, it delivers a full frequency response for exceptionally detailed voice reproduction on stage and its tight supercardioid polar pattern ensures a focused sound that minimises spill and feedback. The M2 also features a lockable on/off switch for added versatility.

- Live performance condenser microphone for vocals
- High-quality 1/2-inch condenser capsule
- Tight supercardioid polar pattern
- Robust, all-metal body
- Integrated on/off switch with locking screw
- 10-year warranty



1/2" CONDENSER
CAPSULE



LOCKABLE
SWITCH



TIGHT POLAR
RESPONSE



10
YEAR
WARRANTY



ACOUSTIC & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Pressure gradient
Active Electronics:	JFET impedance converter with bipolar output buffer
Capsule:	0.50"
Polar Pattern:	Supercardioid
Address Type:	End
Frequency Range:	35Hz - 20kHz
Output Impedance:	50Ω
Maximum SPL:	141dB SPL
Maximum Output Level:	5.2mV (@ 1kHz, 1% THD into 1KΩ load)
Sensitivity:	-44.0dB re 1 Volt/Pascal (6.30mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Equivalent Noise Level (A-Weighted):	23dBA
Power Requirements:	P24 or P48
Output Connection:	XLR



MECHANICAL SPECIFICATIONS

Weight (grams):	308
Dimensions (millimetres):	Height: 187 Width: 47 Depth: 47
Compatible RØDE Accessories:	RM1, DS1, PSA1+, PSA1
Included Accessories:	1 x RM1 1 x ZP1

WHATS IN THE BOX



M2




RM1




ZP1

DIMENSIONS

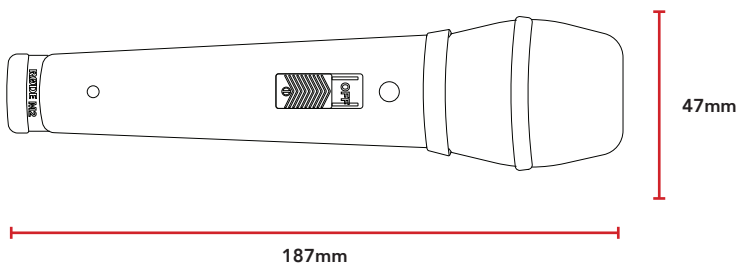

POLAR PATTERN

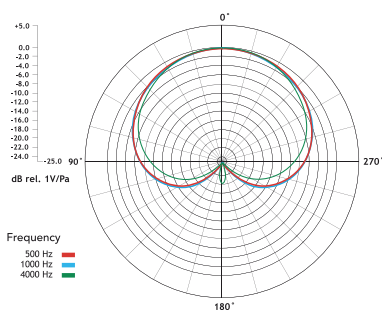

FREQUENCY RESPONSE

